

ITEM NO.: SM355

Applications


Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.

Specification Features


- UL listed for wet locations
- High impact polycarbonate lens and housing
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for PL 1 X 13 Watts Max



Engineering Dimensions

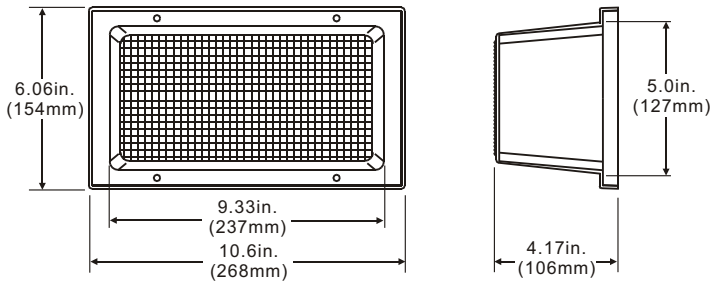

Line Drawing

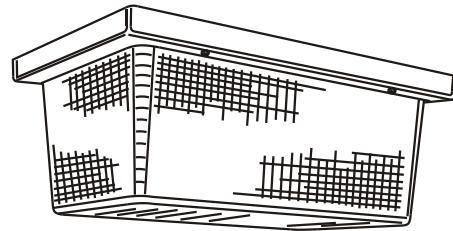

Packing Information

Weights	Cubit Feet	Master Carton Qty	40' Container Qty
14.33LBS	1.51'	6 PCS	8000 PCS

