

Item No.: **SM020**

Applications


Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.

Specification Features

- UL listed for wet locations for ceiling and wall mounting
- High impact polycarbonate
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for MH and HPS100 Watts, PL 2 X26 Watts Max



Engineering Dimensions

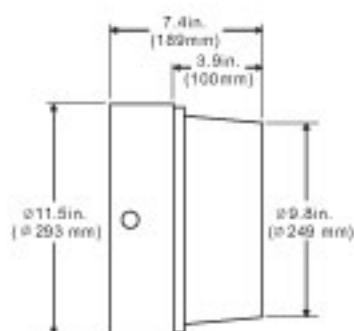

Line Drawing



Packing Information

Weights	Cubit Feet	Master Carton Qty	40'Container Qty
26.19LBS	3.246'	4 PCS	2500 PCS

