

Item No.: **SM021**

Applications


Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.

Specification Features

- UL listed for wet locations for ceiling and wall mounting
- High impact polycarbonate
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for HPS 150 Watts, MH 175 Watts and PL 2 X 42 Watts Max



Engineering Dimensions

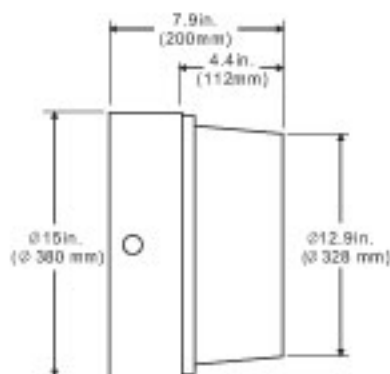

Line Drawing



Packing Information

Weights	Cubit Feet	Master Carton Qty	40' Container Qty
20.64LBS	2.791'	2 PCS	1400 PCS

