

Item No.: **SM106**




**Applications**

Parking areas, entrances, walkways, underpasses, loading docks, recreation areas, tunnel.


**Specification Features**

- UL listed for wet locations
- Heavy duty die-cast aluminum housing with high impact/heat resistant borosilicate glass for ultimate light distribution
- Borosilicate glass is hinged and removable
- Dark Architectural Bronze Color
- Powder coated finish on the heavy duty die cast housing
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- One piece anodized aluminum designed reflector for best light efficiency
- Ideal for MH 175 Watts and HPS 150 Watts Max


**Engineering Dimensions**

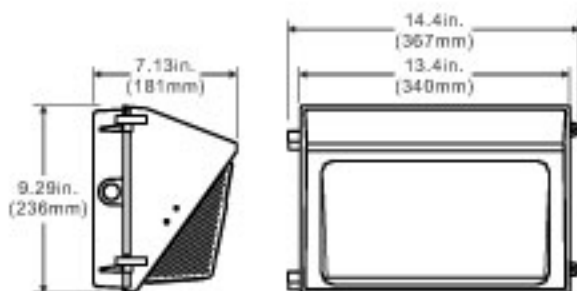

**Line Drawing**

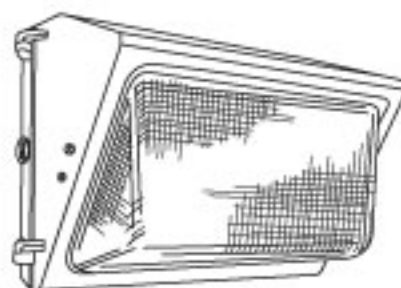

**Assembly Parts**

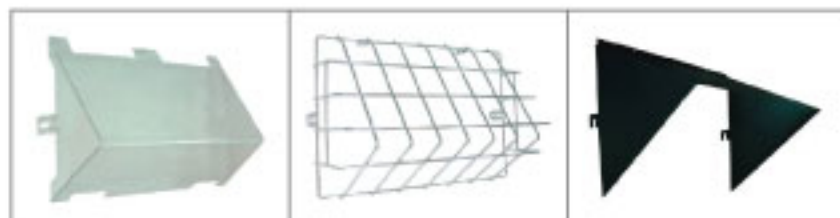

Vandal Shield

Wire Guard

Visor

**Packing Information**

Weights	Cubit Feet	Master Carton Qty	40' Container Qty
9.48LBS	0.834'	1 PC	2200 PCS

