

Item No.: **SM351**

Applications


Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.



Specification Features

- UL listed for wet locations
- High impact polycarbonate lens and housing
- Corrosion Resistant
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for HPS 50 Watts and PL 2X13 Watts Max

Engineering Dimensions

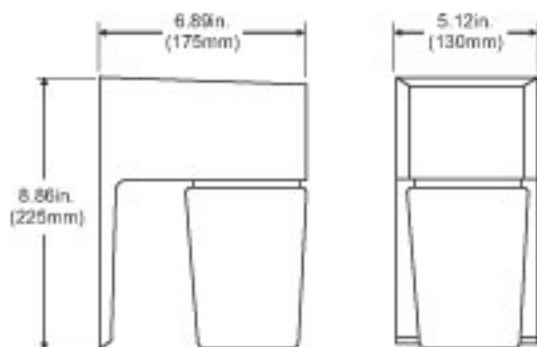

Line Drawing



Packing Information

Weights	Cubit Feet	Master Carton Qty	40' Container Qty
14.77LBS	1.728'	6 PCS	7000 PCS

