

Item No.: **SM354**

Applications


Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.

Specification Features

- UL listed for wet locations
- High impact polycarbonate lens and housing
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for HPS 70 Watts , MH 50 Watts and PL 2X13 Watts Max



Engineering Dimensions

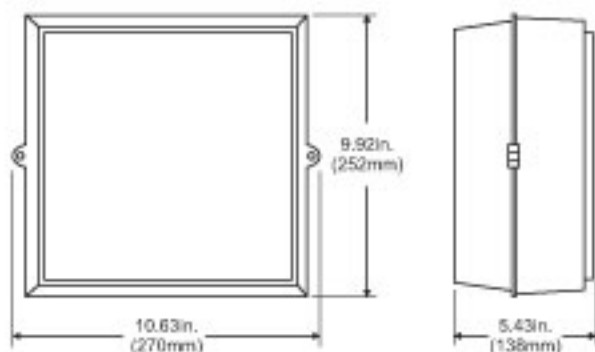

Line Drawing



Packing Information

Weights	Cubit Feet	Master Carton Qty	40'Container Qty
48.68LBS	5.868'	12 PCS	4000 PCS

