

Item No.: **SM384**




Applications

Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.

Specification Features

- UL listed for wet locations
- High impact polycarbonate lens
- Die-cast aluminum base plate with conduit access
- Corrosion Resistant
- Silicone rubber included to prevent any leakage from the outside
- Ideal for HPS 50 Watts and PL 1 X13 Watts Max

Engineering Dimensions

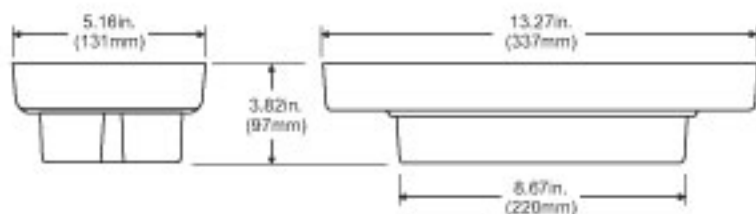

Line Drawing



Packing Information

Weights	Cubit Feet	Master Carton Qty	40' Container Qty
18.08LBS	1.424'	6 PCS	8600 PCS

