

Item No.: **SM705**


Applications

Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.


Specification Features

- UL listed for wet locations
- Heavy duty die-cast aluminum powder coating construction
- High impact UV polycarbonate lens
- Corrosion Resistant
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for HPS and MH 70 Watts, PL 1 X 42 Watts Max

Engineering Dimensions

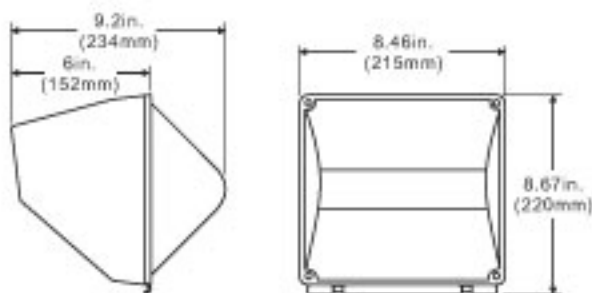

Line Drawing

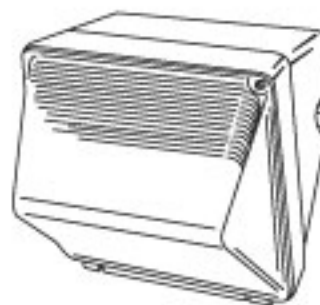

Assembly Parts



Wire Guard

Packing Information

| Weights | Cubit Feet | Master Carton Qty | 40' Container Qty |
|----------|------------|-------------------|-------------------|
| 29.63LBS | 3.026' | 6 PCS | 4000 PCS |

