

Item No.: **SM706**




**Applications**

Parking areas, entrances, walkways, underpasses, loading docks, recreation areas, tunnel.

**Specification Features**

- UL listed for wet locations
- Heavy duty die-cast aluminum housing with high impact/heat resistant borosilicate glass for ultimate light distribution
- Borosilicate glass is hinged and removable
- Dark Architectural Bronze Color
- Powder coated finish on the heavy duty die cast housing
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- One piece anodized aluminum designed reflector for best light efficiency
- Ideal for MH 175 Watts and HPS 150 Watts Max


**Engineering Dimensions**

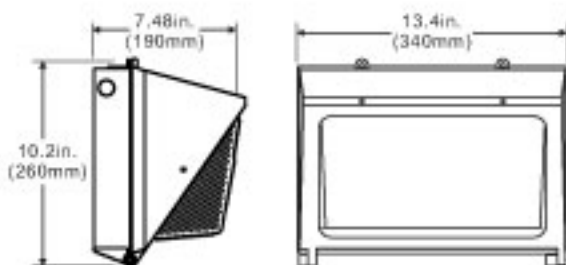

**Line Drawing**



**Assembly Parts**

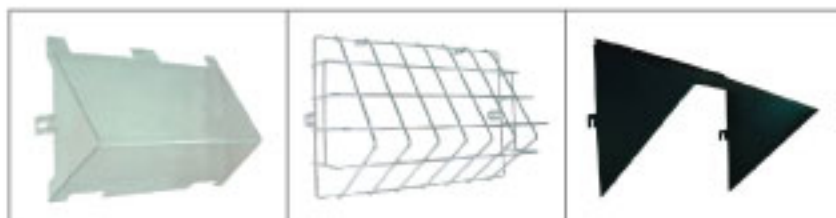

Vandal Shield

Wire Guard

Visor

**Packing Information**

| Weights | Cubit Feet | Master Carton Qty | 40' Container Qty |
|---------|------------|-------------------|-------------------|
| 9.22LBS | 1.008'     | 1 PC              | 2000 PCS          |

